


HOW TO INSTALL YOUR VINYL GRAPHICS!

1. Clean the surface with a non-oily cleanser and dry thoroughly.
2. Position the graphics (with the backing still attached) on the surface, and place one strip of masking tape down the center.
3. Peel back one-half of the graphics and cut off the backing with scissors.
4. Lightly spray the surface with soapy water (optional).



5. Beginning at the center and working your way out, gently press the graphic to the surface in an outward-sweeping motion.
6. Repeat for the other half.
7. Squeegee the entire graphic, with enough pressure to squeeze out the soapy water.
8. Allow the graphics to dry for about 15 minutes (if you used soapy water).
9. Carefully peel back the masking tape. If the graphics aren't adhered to the surface yet, allow it to dry for a few more minutes and try again.

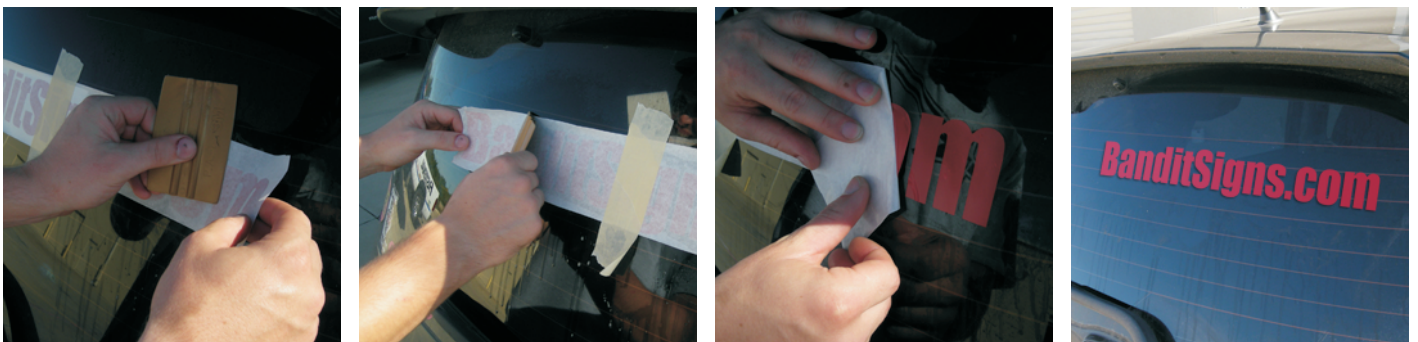

AFTERCARE

- Your graphics should last about 3-5 years under normal weather conditions.
- Keep high pressure car wash nozzles at least 18" from the edge of graphics when washing your vehicle.
- Do not use harsh solvents such as acetone or paint thinner on the graphics.
- When you remove the graphics, peel each letter off by hand, using a razorblade if needed, then remove the adhesive residue with a solvent such as Goo Gone®.